


FIREPLACES  
INSERTS  
STOVES

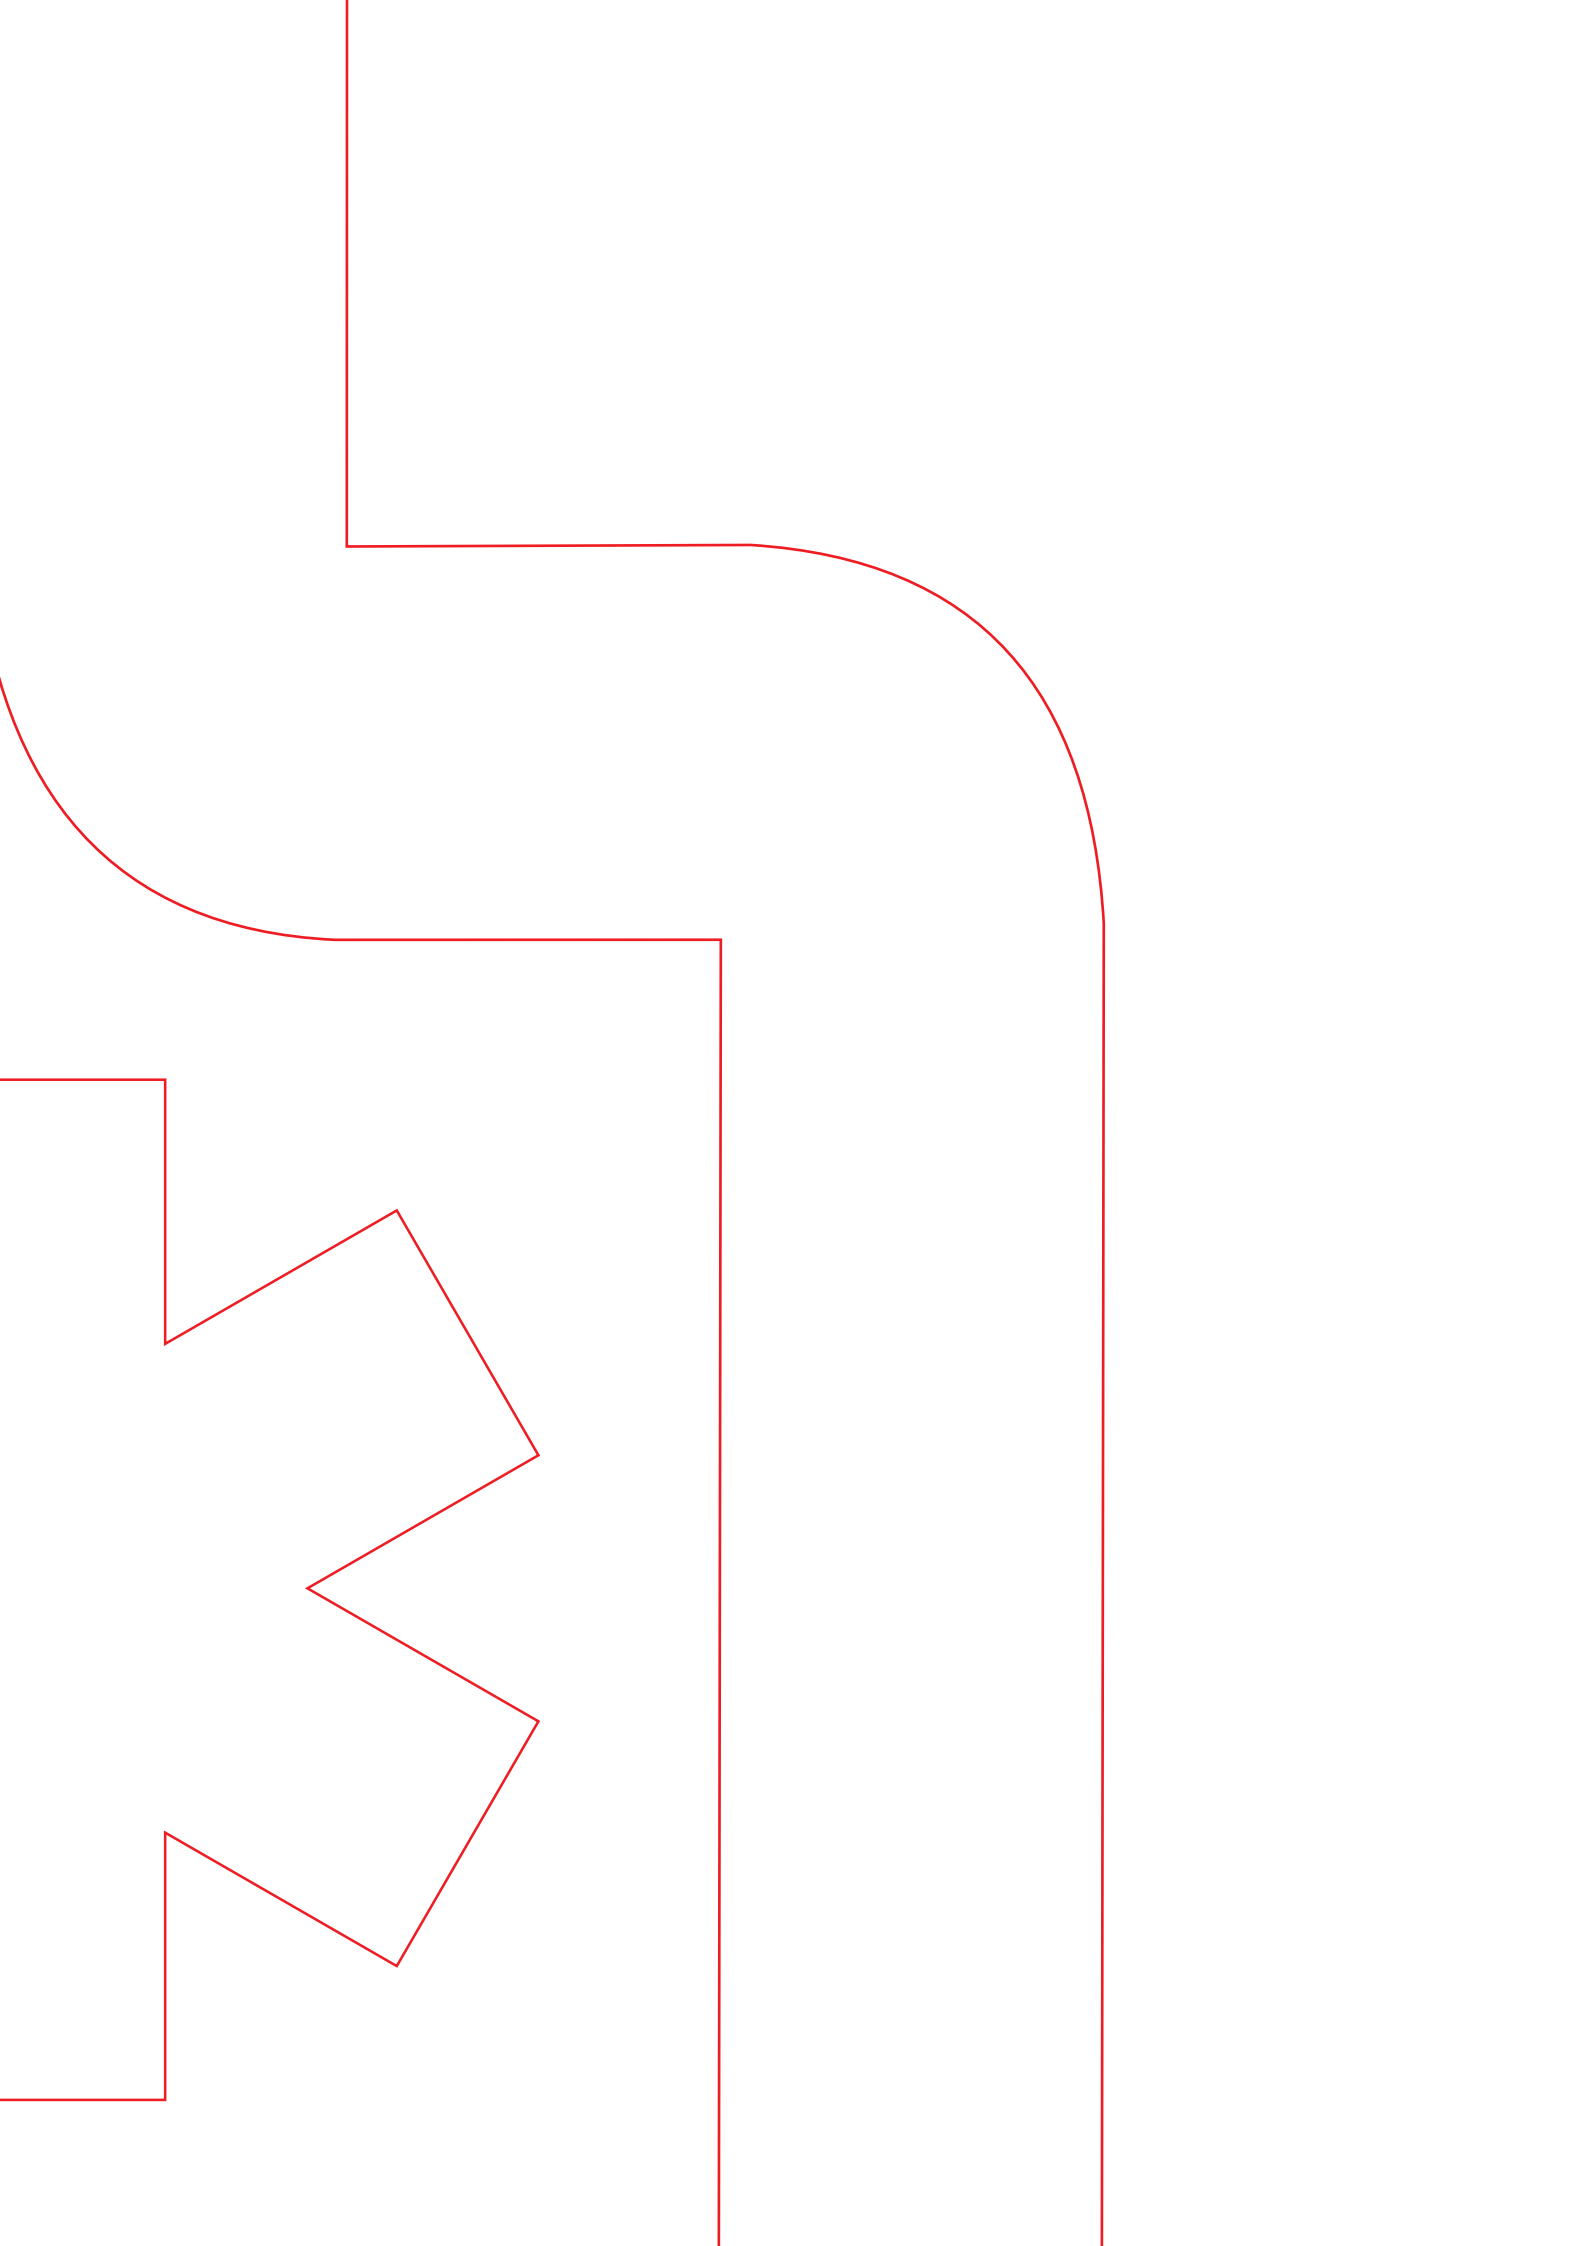

# EDILKAMIN

## A TRUSTED BRAND FOR OVER 55 YEARS

Edilkamin is a group employing over 400 people, with more than 80 sales agents and over 400 technical assistance centres.

Ever careful to the needs of a continuously evolving market, Edilkamin proposes technologically advanced solutions featuring sophisticated design, in line with contemporary necessities.

Edilkamin exports technology and design with success to over 30 countries worldwide.



# EDILKAMIN



## ② LAVAGNO (Verona)

Technical Centre and Research & Development Lab.



## ③ GABBIONETA BINANUOVA (Cremona)

Production Unit and Research & Development Unit for obtaining important certifications.



## ④ CONTROGUERRA (Teramo)

Logistics centre for managing services in Central-Southern Italy.







## 1 LAINATE

Head office, Sales and Marketing divisions, Accounts, Information & Technology departments, classrooms for technical and sales training.



## 5 GIRONA (Spagna)

Edilkamin Iberica, commercialisation centre for Spain and Portugal



## 6 SARVAR (Ungheria)

Edilkamin International, production unit



## 7 BUDAÖRS (Ungheria)

Edilkamin International, Show room.



## 8 ATENE (Grecia)

Edilkamin Hellas, showroom and commercialisation centre for Greece.



## AFTER-SALES

After-sales support is a crucial service: the Edilkamin staff offers timely support whenever required, for responding to any need.

## TRUST AND RELIABILITY

Edilkamin supports customers throughout all phases, from selection of the product to its installation. Moreover, where required, qualified personnel is always on hand for any need.

## TESTING AND TRACEABILITY

Every Edilkamin product is tested to guarantee its maximum efficiency and reliability. The traceability system allows for tracking the product, individual component and assembly operator to solve any problems in the shortest possible time.

## CERTIFICATION

Products, in addition to the CE marking and according to rules:

**EN 13229**\_Fireplaces

**EN 13240**\_Wood-stoves

**EN 14785**\_Pellet stoves

**EN 303-5**\_Boilers

in accordance with need, shall comply with the criteria set by:

**Flamme Verte:** French certification stamp of quality

**Blmsch:** German requirement for domestic heating appliance

**15 a B-VG:** Austrian emissions law

**EAC:** Eurasian Countries (Russia, Kazakhstan, Belarus) conformity certification

**BAFA:** German Energy Ministry

**EKO SKLAD:** Slovenian Ministry of Energy

All Edilkamin products meet the criteria of energy efficiency classes

**A++**, **A+**, **A**

According to the UE 2015-1186/1187.

# Saving QUALITY ECOLOGY


## WHY WOOD?

It's easy to find

It's a natural raw material

It's the cheapest fuel

It offers a very suggestive environment

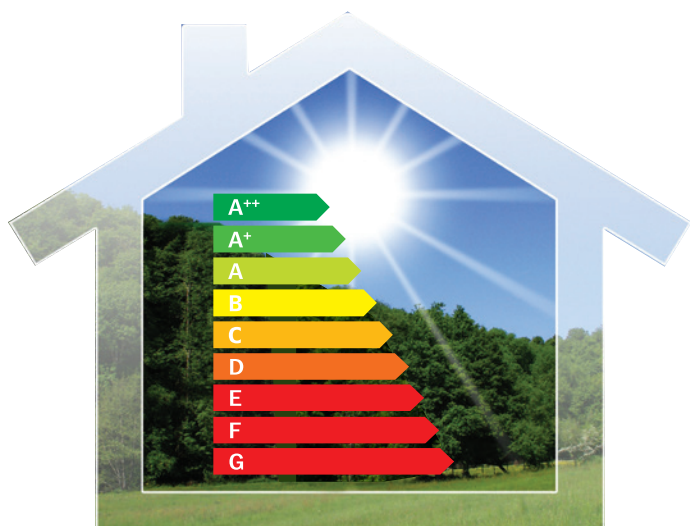



# An Evolving TECHNOLOGY

## AIR DIFFUSER

**Heat and adjustable light for made-to-measure comfort.**

For wood burning fireplaces and stoves, Edilkamin has made available an AIR DIFFUSER, an electronic control unit managed via remote control, allowing you to adjust hot air ventilation and lighting intensity, creating the perfect atmosphere. AIR DIFFUSER manages up to 2 fans: each fan can duct hot air up to a maximum of 8 metres (with a single duct) or 4 metres (two ducts).

## DESIGN VENTS

**"Beauty" distributing heat.** Edilkamin stoves, fireplaces and inserts can distribute hot air to heat multiple rooms. Today, technology meets design, with two new types of vents:

- for hot air circulation in the counter hood.
- to diffuse hot air in the room.

## COMPENSATION VENTS

To position on the fireplace counter hood. Can be combined with the design vents to diffuse hot air.

### TRATTO PUNTO




### LABEL



cm 60 x 7 h

cm 90 x 7 h

## DUCTING VENTS

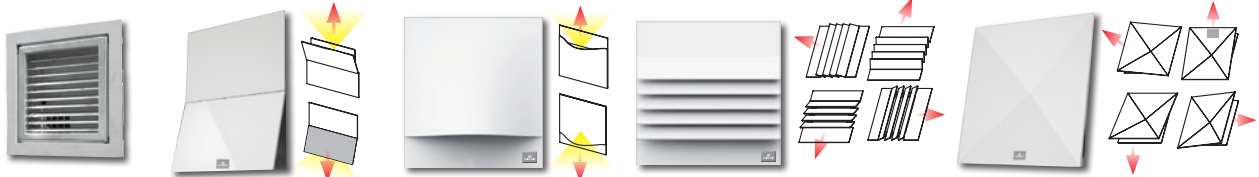

**BASIC V\***  
cm 20 x 20

**SPLIT V\* - SPLIT**  
cm 20 x 20

**BENT V\* - BENT**  
cm 20 x 21,5 h

**SHARP V\* - SHARP**  
cm 20 x 20

**ORIGAMI V\* - ORIGAMI**  
cm 20 x 20

\* With integrated fan









# Hot air heating

IN JUST ONE OR  
MORE DUCTED ROOMS

Edilkamin fireplaces, inserts and stoves allow for the rooms in which they are installed to be heated by radiation, while also diffusing hot air through the frontal grills using fans. Certain models even allow for the hot air to be channelled into adjacent rooms.




FIREPLACES  
INSERTS  
STOVES

INDEX P. 64




## Windo3 85

13,2 kW\_345 m<sup>3</sup>\_92x63xh150 cm



## Windo3 P50

12 kW\_315 m<sup>3</sup>\_58x92xh150 cm



### WOOD FIREPLACES

#### Glass on three sides

- \_ Combustion chamber in Ecokeram
- \_ Ductable hot air
- \_ Combustion air adjustment
- \_ Easy glass cleaning

Optional:

- \_ Kits for warm-air ducting:
  - Kit 1/bis, kit 4/bis, kit 5/bis
  - KIT AIR DIFFUSER
- \_ Ducting vents:
  - Basic V, Split V, Bent V, Sharp V, Origami V

### WOOD FIREPLACES

#### Glass on three sides


- \_ Combustion chamber in Ecokeram
- \_ Ductable hot air
- \_ Combustion air adjustment
- \_ Easy glass cleaning

Optional:


- \_ Kits for warm-air ducting:
  - Kit 1/bis, kit 4/bis, kit 5/bis
  - KIT AIR DIFFUSER
- \_ Ducting vents:
  - Basic V, Split V, Bent V, Sharp V, Origami V



Kit 1/bis, kit 4/bis,  
kit 5/bis



KIT AIR DIFFUSER



Basic V, Split V, Bent V,  
Sharp V, Origami V










## Windo2 75

13,2 kW\_345 m³\_94x63xh150 cm L/R




## Windo2 95

14,7 kW\_385 m³\_114x63xh150 cm L/R

## Side Plus 50x50

12,4 kW\_325 m³\_60x60xh148 cm



### WOOD FIREPLACES

- \_ Combustion chamber in Ecokeram
- \_ Right or left corner glass
- \_ Ductable hot air
- \_ Combustion air adjustment
- \_ Easy glass cleaning

Optional:


- \_ Kits for warm-air ducting:
  - Kit 1/bis, kit 4/bis, kit 5/bis
  - KIT AIR DIFFUSER
- \_ Ducting vents:
  - Basic V, Split V, Bent V, Sharp V, Origami V

### WOOD FIREPLACES


- \_ Combustion chamber in Ecokeram
- \_ Sliding door, flat angled glass
- \_ 1 hot air outlet
- \_ Glass cleaning system
- \_ Post-combustion system

Optional:

- \_ Kits for warm-air ducting:
  - Kit 6/bis
- \_ Ducting vents:
  - Basic V, Split V, Bent V, Sharp V, Origami V




Kit 1/bis, kit 4/bis,  
kit 5/bis



KIT AIR DIFFUSER



Kit 6/bis



Basic V, Split V, Bent V,  
Sharp V, Origami V









## Cristal 76

15 kW\_390 m³\_98x65xh147 cm



## Cristal 90

20,1 kW\_525 m³\_112x65xh168 cm



### WOOD FIREPLACES

- \_ Combustion chamber in Ecokeram
- \_ 2 outputs for ducting hot air (kit optional)
- \_ Provided with manual combustion-air regulation deflector
- \_ Glass cleaning system

Optional:

- \_ Ventilation kit to convert version N into forced ventilation
- \_ Kits for warm-air ducting:
  - Kit 1/bis, kit 2/bis, kit 3/bis
- \_ Ducting vents:
  - Basic V, Split V, Bent V, Sharp V, Origami V

### WOOD FIREPLACES


- \_ Combustion chamber in Ecokeram
- \_ 4 outputs for ducting hot air (kit optional)
- \_ Provided with manual combustion-air regulation deflector
- \_ Glass cleaning system

Optional:

- \_ Ventilation kit to convert version N into forced ventilation
- \_ Kits for warm-air ducting:
  - Kit 4/bis, kit 5/bis
- \_ Ducting vents:
  - Basic V, Split V, Bent V, Sharp V, Origami V



Kit 1/bis, kit 2/bis,  
kit 3/bis




Basic V, Split V, Bent V,  
Sharp V, Origami V





# Double

12 kW\_315 m<sup>3</sup>\_98x67xh147 cm




## WOOD FIREPLACES


- \_ Combustion chamber in Ecokeram
- \_ Two-sided hearth with sliding door and hinged door
- \_ 2 outputs for ducting hot air (kit optional)
- \_ Glass cleaning system

Optional:


- \_ Ventilation kit to convert version N into forced ventilation
- \_ Kits for warm-air ducting:
  - Kit 1/bis, kit 2/bis, kit 3/bis
- \_ Ducting vents:
  - Basic V, Split V, Bent V, Sharp V, Origami V



Kit 1/bis, kit 2/bis,  
kit 3/bis



kit 4/bis, kit 5/bis




Basic V, Split V, Bent V,  
Sharp V, Origami V




## Flat 100

12 kW\_315 m³\_125x59xh134 cm



## Flat 120

14 kW\_365 m³\_143x59xh134 cm



### WOOD FIREPLACES

- Combustion chamber in Ecokeram.
- 4 outputs for ducting hot air (kit optional),
- provided with manual combustion-air regulation deflector
- complete sliding door in ceramic glass
- Glass cleaning system

Optional:

\_Ventilation kit to convert version N into forced ventilation

\_Kits for warm-air ducting:


- Kit 1/bis, kit 2/bis, kit 3/bis, Kit 4/bis, kit 5/bis

\_Ducting vents:


- Basic V, Split V, Bent V, Sharp V, Origami V



Kit 1/bis, kit 2/bis,  
kit 3/bis



kit 4/bis, kit 5/bis



Basic V, Split V, Bent V,  
Sharp V, Origami V








NEW

## IC Tekno

1 N/V - front

15,2 kW \_395 m<sup>3</sup> \_95x63,5x155h cm

NEW

## IC Tekno

2 N/V - glass on one side

15,2 kW \_395 m<sup>3</sup> \_95x66x155h cm

## WOOD FIREPLACES

- \_ Cast iron combustion chamber
- \_ 2 outputs for ducting hot air (kit optional)
- \_ Operation via natural convection or forced ventilation
- \_ Post-combustion system

Optional:

- \_ Kits for warm-air ducting:
  - Kit 1/bis, kit 2/bis, kit 3/bis



Kit 1/bis, kit 2/bis, kit 3/bis

NEW

## IC Tekno

3 N/V - prismatic

15,2 kW \_395 m<sup>3</sup> \_95x62x155h cm








## NEW Forte Up2


15,2 kW\_395 m<sup>3</sup>\_98x60xh160 cm



Energy  
A++  
A+  
**A**  
B  
C  
D  
E  
F  
G

## NEW Status Up2

15,2 kW\_395 m<sup>3</sup>\_95x60xh160 cm



Energy  
A++  
A+  
**A**  
B  
C  
D  
E  
F  
G

### WOOD FIREPLACES

- \_ Cast iron combustion chamber
- \_ 4 outputs for ducting hot air (kit optional)
- \_ With synoptic front panel (version V)
- \_ Post-combustion system

Optional:

- \_ Ventilation kit to convert version N into forced ventilation
- \_ Kits for warm-air ducting:
  - Kit 1/bis, kit 2/bis, kit 3/bis
  - Kit 4/bis, kit 5/bis
- \_ Ducting vents:
  - Basic V, Split V, Bent V, Sharp V, Origami V

### WOOD FIREPLACES

- \_ Cast iron combustion chamber
- \_ 4 outputs for ducting hot air (kit optional)
- \_ With synoptic front panel (version V)
- \_ Post-combustion system

Optional:


- \_ Ventilation kit to convert version N into forced ventilation
- \_ Kits for warm-air ducting:
  - Kit 1/bis, kit 2/bis, kit 3/bis
  - Kit 4/bis, kit 5/bis
- \_ Ducting vents:
  - Basic V, Split V, Bent V, Sharp V, Origami V



Kit 1/bis, kit 2/bis, kit 3/bis




kit 4/bis, kit 5/bis



Basic V, Split V, Bent V,  
Sharp V, Origami V



**NEW** Titano Up2  
15,2 kW\_395 m<sup>3</sup>\_96x60xh160 cm



### WOOD FIREPLACES

- \_ Cast iron combustion chamber
- \_ Right or left corner glass
- \_ 4 outputs for ducting hot air (kit optional)
- \_ With synoptic front panel (version V)
- \_ Post-combustion system

Optional:


- \_ Ventilation kit to convert version N into forced ventilation

\_ Kits for warm-air ducting:

- Kit 1/bis, kit 2/bis, kit 3/bis, Kit 4/bis, kit 5/bis

\_ Ducting vents:


- Basic V, Split V, Bent V, Sharp V, Origami V



Kit 1/bis, kit 2/bis,  
kit 3/bis



kit 4/bis, kit 5/bis




Basic V, Split V, Bent V,  
Sharp V, Origami V



## Airfire\*

10 kW\_260 m³\_92x65-xh147 cm




Flat hatch



## Airfire\*

10 kW\_260 m³\_84x67xh147 cm



Prismatic hatch



### WOOD FIREPLACES

- Base structure and hood in steel,  
vertical sliding opening
- combustion chamber in Ecokeram
  - natural convection
  - screen-printed ceramic glass
  - glass cleaning system

\* While stocks last








## Screen Evo 80/2

10,4 kW\_270 m³\_93x53xh75 cm




## Screen Evo 100

14,6 kW\_380 m³\_113x53xh75 cm

## Screen Up 80/2

10,4 kW\_270 m³\_93x53xh75 cm



## Screen Up 100\*

14,6 kW\_380 m³\_113x53xh75 cm



### WOOD FIREPLACES

#### Side opening

- \_ Combustion chamber in Ecokeram
- \_ Ductable hot air (optional kit)
- \_ 2 compensation vents (LABEL)

#### Optional:

- \_ Thermostat valve to adjust combustion
- \_ Height adjustable stand
- \_ Kits for warm-air ducting:
  - Kit 1/bis, kit 2/bis, kit 3/bis
  - KIT AIR DIFFUSER
- \_ Ducting vents:
  - Basic V, Split V, Bent V, Sharp V, Origami V


### WOOD FIREPLACES

#### Flip-up opening

- \_ Combustion chamber in Ecokeram
- \_ Ductable hot air (optional kit)
- \_ 2 compensation vents (LABEL)

#### Optional:


- \_ Thermostat valve to adjust combustion
- \_ Height adjustable stand
- \_ Kits for warm-air ducting:
  - Kit 1/bis, kit 2/bis, kit 3/bis
  - KIT AIR DIFFUSER
- \_ Ducting vents:
  - Basic V, Split V, Bent V, Sharp V, Origami V

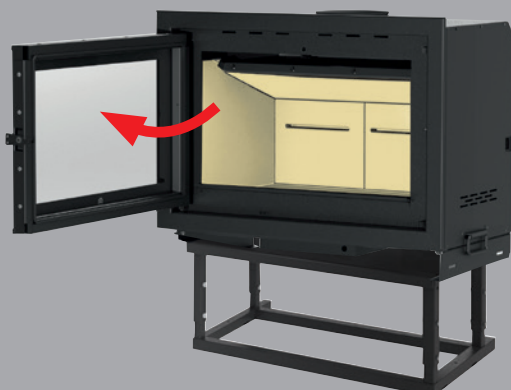






Kit 1/bis, kit 2/bis,  
kit 3/bis



KIT AIR DIFFUSER



Basic V, Split V, Bent V,  
Sharp V, Origami V



# Inserts




Wood inserts are the ideal solution for transforming an old fireplace that releases smoke, doesn't provide enough heat or consumes too much wood, into an efficient, clean and economical heating machine. Wood inserts can duct hot air into adjacent rooms. Both solutions increase heat output, reduce emissions and reduce heating costs.






## Firebox Luce Plus

54 • 9,6 kW\_250 m<sup>3</sup>\_65x45xh61 cm  
62 • 9,6 kW\_250 m<sup>3</sup>\_70x50xh68 cm



## Firebox Deco

9,6 kW\_250 m<sup>3</sup>\_65x45xh54 cm



### WOOD INSERTS

- \_ Cast iron combustion chamber
- \_ 2 outputs for ducting hot air (kit optional)
- \_ Operation via natural convection or forced ventilation
- Glass cleaning system
- Post-combustion system

Optional:

\_ Kits for warm-air ducting:

- Kit 1, kit 2, kit 3

\_ Ducting vents:

- Basic V, Split V, Bent V, Sharp V, Origami V

### WOOD INSERTS

- \_ Cast iron combustion chamber
- \_ 2 outputs for ducting hot air (kit optional)
- \_ forced ventilation
- Glass cleaning system
- Post-combustion system

Optional:

\_ Kits for warm-air ducting:


- Kit 1, kit 2, kit 3

\_ Ducting vents:

- Basic V, Split V, Bent V, Sharp V, Origami V



kit 1, kit 2, kit 3




Basic V, Split V, Bent V,  
Sharp V, Origami V



# Firebox Riga

54 • 9,6 kW\_250 m<sup>3</sup>\_65x45xh54 cm



49 • 9,6 kW\_250 m<sup>3</sup>\_71x45xh49 cm



## WOOD INSERTS

- \_ Cast iron combustion chamber
- \_ 2 outputs for ducting hot air (kit optional)
- \_ Forced ventilation
- Glass cleaning system
- Post-combustion system

Optional:

\_ Kits for warm-air ducting:

- Kit 1, kit 2, kit 3


\_ Ducting vents:

- Basic V, Split V, Bent V, Sharp V, Origami V

Glass on one side



kit 1, kit 2, kit 3



Basic V, Split V, Bent V,  
Sharp V, Origami V









## Kubicalor Piana

9,6 kW \_ 250 m<sup>3</sup> \_ 69x49xh66 cm



## Kubicalor Ecostar

9,6 kW \_ 250 m<sup>3</sup> \_ 76x45xh54 cm



Energy  
A++  
**A+**  
A  
B  
C  
D  
E  
F  
G



Energy  
A++  
**A+**  
A  
B  
C  
D  
E  
F  
G



### WOOD INSERTS


- \_ Cast iron combustion chamber
- \_ 2 outputs for ducting hot air (kit optional)
- \_ forced ventilation
- \_ Post-combustion system

Optional:

- \_ Kits for warm-air ducting:
  - Kit 1, kit 2, kit 3

## Kubicalor Sprint

9,6 kW \_ 250 m<sup>3</sup> \_ 70x45xh55,5 cm



Energy  
A++  
**A+**  
A  
B  
C  
D  
E  
F  
G



Kit 1, Kit 2, Kit 3











Grey steel



KIT AIR DIFFUSER



Basic V, Split V, Bent V,  
Sharp V, Origami V



Soapstone



Black steel



Bronze steel






# Tally 8

8 kW \_210 m³ \_50x50xh128 cm

h131cm (Soapstone)



## WOOD BURNING STOVES

- \_ Vermiculite combustion chamber
- \_ Automatic door closure with shock absorber
- \_ High yield combustion compartment
- \_ Natural convection
- \_ Wood compartment
- \_ Combustion air adjustment via command

Optional:

- \_ Automatic switch on kit
- \_ Cast iron combustion chamber
- \_ Kit Air Diffuser
- \_ Ducting vents:  
Split V, Bent V, Origami V, Sharp V, Basic V




\_ Black steel wooden drawer kit

Tally 8 (optional)

Tally 8 Up

# Tally 8 Up

\_ Round glass



Bronze steel



Grey steel



Black steel




Soapstone








Soapstone



KIT AIR DIFFUSER



Basic V, Split V, Bent V,  
Sharp V, Origami V



Grey steel



Black steel



Bronze steel



# Tally 8 Up s

8 kW \_210 m³ \_50x50xh176 cm

h179 cm (Soapstone)

\_Round glass

## WOOD BURNING STOVES

- \_ Vermiculite combustion chamber
- \_ Automatic door closure with shock absorber
- \_ High yield combustion compartment
- \_ Natural convection
- \_ Wood compartment
- \_ Combustion air adjustment via command

Optional:

- \_ Automatic switch on kit
- \_ Cast iron combustion chamber
- \_ Kit Air Diffuser
- \_ Ducting vents:
- \_ Split V, Bent V, Origami V, Sharp V, Basic V

### Prepared for accumulation (kit optional)


The top with refractory rings allows prolonged heat accumulation to heat the house, even for hours after the last wood was loaded. Load at night and a new switch switches on in the morning.




Top with refractory rings.  
(kit optional)



\_ Black steel wooden drawer kit  
Tally 8 Up s  
Tally 8 s (optional)



# Tally 8 s



Black steel



Grey steel



Soapstone



Bronze steel








# Fiord \*

8 kW\_210 m<sup>3</sup>\_47x41,5xh133,5 cm




## WOOD BURNING STOVES

- \_ Vermiculite combustion chamber
- \_ Automatic door closure with shock absorber
- \_ Natural convection
- \_ Wood compartment
- \_ Combustion air adjustment via command

Optional:

- \_ Automatic switch on kit
- \_ Cast iron combustion chamber
- \_ Kit Air Diffuser
- \_ Ducting vents: Split V, Bent V, Origami V, Sharp V, Basic V


\* While stocks last




Energy  
A++  
A+  
A  
B  
C  
D  
E  
F  
G




Black steel and soapstone



KIT AIR DIFFUSER



Basic V, Split V, Bent V,  
Sharp V, Origami V




# Ninfa

9 kW\_235 m<sup>3</sup>\_52x52xh95 cm

## WOOD BURNING STOVES


- \_ Cast iron combustion chamber
- \_ Removable rings for heating food



Bordeaux ceramic



Beige ceramic





# Dafne Oven

7,2 kW\_190 m<sup>3</sup>\_44x45x122 cm




bordeaux ceramic



leather ceramic






## Dafne

7,2 kW \_ 190 m<sup>3</sup> \_ 44x45x92 cm

### WOOD BURNING STOVES

- \_ Cast iron combustion chamber
- \_ Removable rings for heating food



leather ceramic




bordeaux ceramic












# Hot water heating

## WITH WATER ALL THE HOUSE

Edilkamin stoves and fireplaces produce hot water that can be used to supply all of the radiators and underfloor heating panels throughout the entire house. They can be connected to existing systems, and can even be used to supplement gas boilers and modern solar panels.

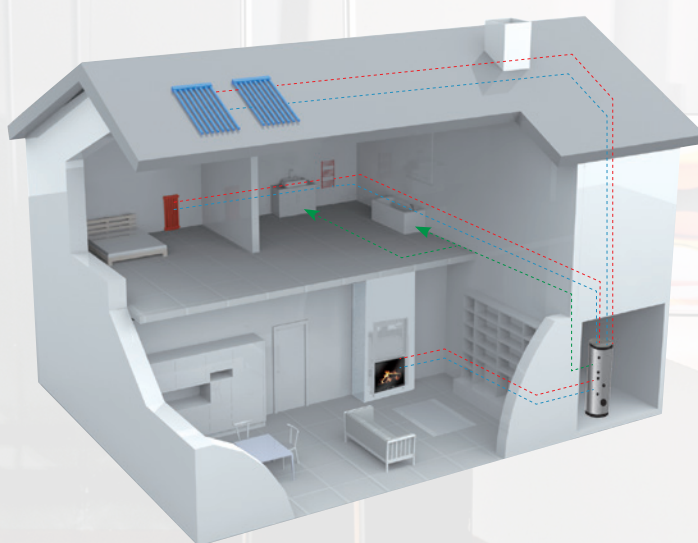

THERMO-FIREPLACES

THERMO-STOVES

INDEX P. 64





## H<sub>2</sub>Oceano 15

16,6 kW\_8,2 kW (H<sub>2</sub>O)\_435 m<sup>3</sup>\_74x62xh135 cm

## H<sub>2</sub>Oceano 23

23 kW\_13,3 kW (H<sub>2</sub>O)\_600 m<sup>3</sup>\_88x68xh147 cm

## H<sub>2</sub>Oceano 28


28,1 kW\_17,4 kW (H<sub>2</sub>O)\_730 m<sup>3</sup>\_106x78xh147 cm

### WOOD THERMO-FIREPLACES

- \_Cast iron and steel combustion chamber
- \_All-glass front
- \_Spit unit with steel rod
- \_Post-combustion system
- \_Coil and Safety valve,  
for installation with closed tank (CS versions)

Optional:

- \_Hydraulic kits (Page 50)



18 Ø (H<sub>2</sub>oceano 15)  
22 Ø (H<sub>2</sub>oceano 23)  
25 Ø (H<sub>2</sub>oceano 28)



"Backpack" hydraulic kit V








## Acquatondo 22

23 kW\_13,3 kW (H<sub>2</sub>O)\_m<sup>3</sup> 600\_cm 80x68xh138,5

## Acquatondo 29

28,1 kW\_17,4 kW (H<sub>2</sub>O)\_m<sup>3</sup> 730\_cm 99x78xh138,5



20 Ø (Acquatondo 22)  
25 Ø (Acquatondo 29)

### WOOD THERMO-FIREPLACES

- \_Cast iron and steel combustion chamber
- \_Spit unit with steel rod
- \_Coil and Safety valve,  
for installation with closed tank (CS versions)

Optional:

- \_Hydraulic kits (Page 50)

Plus

22\_22 cs \_29\_29 cs



Prismatic  
22\_29\_29 cs



Glass on one side  
29










## Idro 30


14,8 kW \_ 8,6 kW (H<sub>2</sub>O) \_ m<sup>3</sup> 385 \_ cm 65x53x99h



16 Ø

## Idro 50

16,6 kW \_ 8,2 kW (H<sub>2</sub>O) \_ m<sup>3</sup> 435 \_ cm 77x66x138h



18 Ø

Energy  
A++  
A+  
**A**  
B  
C  
D  
E  
F  
G



Energy  
A++  
A+  
**A**  
B  
C  
D  
E  
F  
G



### WOOD THERMO-FIREPLACES

- \_ Cast iron and steel combustion chamber
- \_ Spit unit with steel rod
- \_ Coil and Safety valve,  
for installation with closed tank (CS versions)

Optional:

- \_ Hydraulic kits (Page 50)








# Flamma

14,2 kW\_9,7 kW(H<sub>2</sub>O)\_370 m<sup>3</sup>\_63x56xh134 cm  
23,6 kW\_14,6 kW(H<sub>2</sub>O)\_615 m<sup>3</sup>\_63x56xh134 cm




## WOOD THERMO-STOVES

- \_ Steel and vermiculite combustion chamber
- \_ Automatic door closure with shock absorber
- \_ No expansion tank
- \_ Combustion-air regulation
- \_ Coil and Safety valve, for installation with closed tank (CS versions)

Optional

- \_ Ventilation kit
- \_ Hydraulic kits (Page 50)



Bordeaux ceramic



Dark grey ceramic



Parchment ceramic







Cream white ceramic



# Coverings



## Silver

Flat surrounding in light grey painted steel.

- Firebox Luce Plus 54, Firebox Deco\*\*, Firebox Riga 54\*\*, cm 103x4,2x89 h;
- Firebox Luce Plus 62, 107x4x96 h;
- Forte Up2, Acquatondo 22 (Plus and version CS) 102x3x82 h;

- Acquatondo 29 (Plus and version CS) 110x3x82 h;
- Cristal 76 - Double 102x3x87 h;
- Flat 100 128x3x79 h;

## Iron

Tapared surrounding in dark grey painted steel.

- Firebox Luce Plus 54, Firebox Deco\*\*, Firebox Riga 54\*\*, cm 108x9,2x95 h.
- Acquatondo 22 (Plus and version CS), Forte Up2 cm 109x8x88 h;
- Acquatondo 29 (Plus and version CS) cm 116x8x88 h;
- Firebox Luce Plus 62 cm 113,5x9,2x102 h;
- Cristal 76 - Double cm 108x13x93 h,
- Flat 100 cm 135x8x85 h.



\*\* pairing black steel frame outline optional



## Grey Up

Surrounding in dark grey powder painted steel.


- Screen Up 80/2, Screen Evo 80/2 cm 121,5x9,5x92 h;
- Screen Up 100, Screen Evo 100 cm 141,5x9,5x92 h.



## HYDRAULIC KITS Open expansion tank

### KIT A1

H<sub>2</sub>Oceano 15\_23\_28, Acquatondo 22\_29, Idro 30, Idro 50, Flamma



For combined installation with a second boiler without domestic hot water production

### KIT C


H<sub>2</sub>Oceano 15\_23\_28, Acquatondo 22\_29, Idro 30, Idro 50, Flamma



For separating primary circuit from secondary circuit and HSW.

### KIT B


H<sub>2</sub>Oceano 15\_23\_28, Acquatondo 22\_29, Idro 30, Idro 50, Flamma



For separating primary circuit from secondary circuit and instant production of HSW.

### KIT V

H<sub>2</sub>Oceano 15\_23\_28




For combined installation with a second boiler with domestic hot water production

## Closed expansion tank


### KIT D

H<sub>2</sub>Oceano 15\_23\_28 cs, Acquatondo 22\_29 cs, Idro 30 cs, Idro 50 cs, Flamma 14\_24 cs



For installing thermo fireplaces, thermo stoves and wood boilers; suited for separating primary circuit from secondary circuit and HSW production.

### SAFETY KIT



To be installed at a maximum distance of 50 cm from the heat generator.

### KIT R: Flamma cs

For installing a single heat source without domestic hot water production.

### KIT RW: Flamma cs

For installing a single heat source with instantaneous domestic hot water production.

### KIT R2: Flamma cs


For combined installation with a second boiler without domestic hot water production with system separator.

### KIT RW2: Flamma cs


For combined installation with a second boiler with domestic hot water production and system separator.

**FIREPLACES**


**Windo2 75**

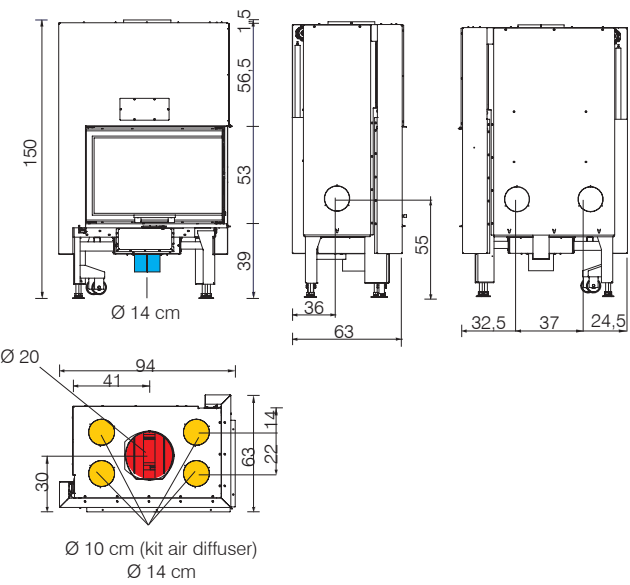


**Windo2 95**

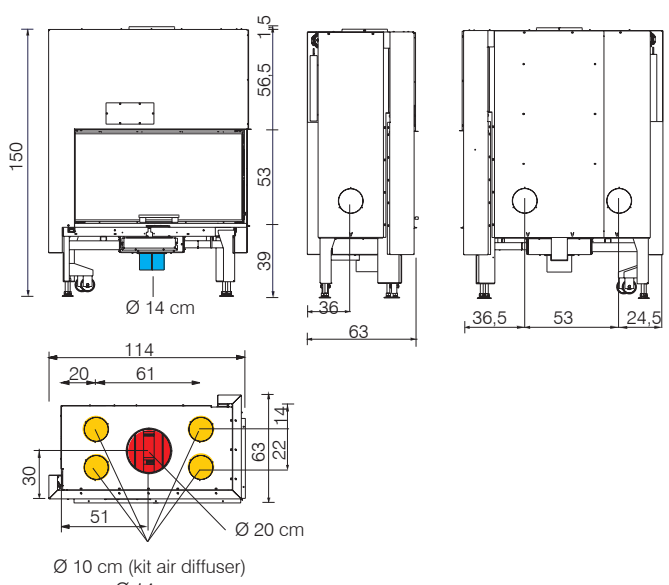

**Windo3 P50**

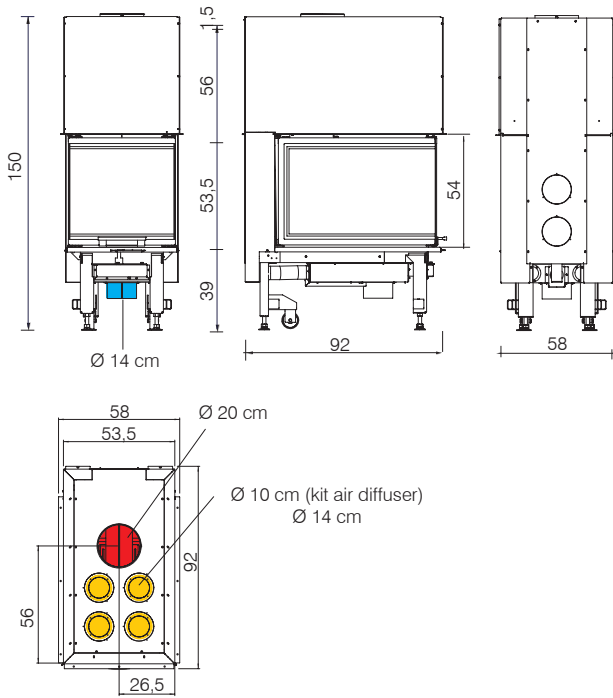


**Windo3 85**

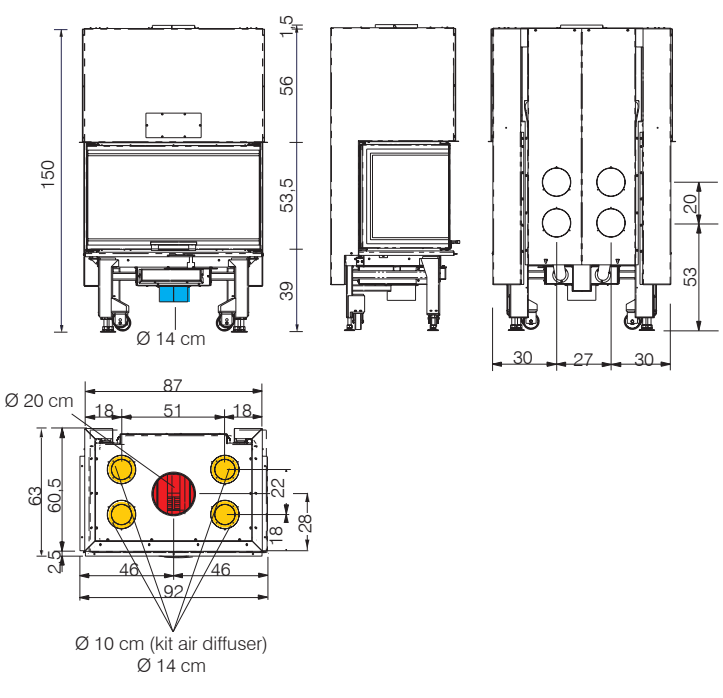




**FIREPLACES**


**Side Plus 50x50**

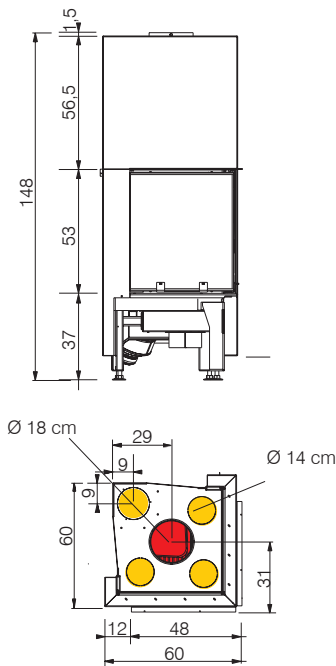


**Airfire**

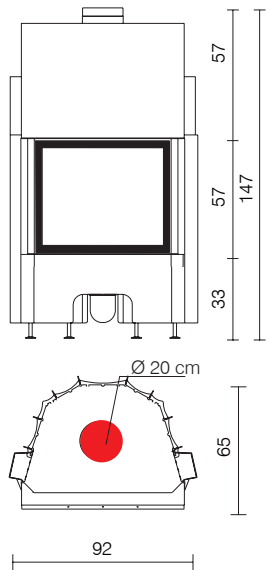


**Airfire  
prismatic**

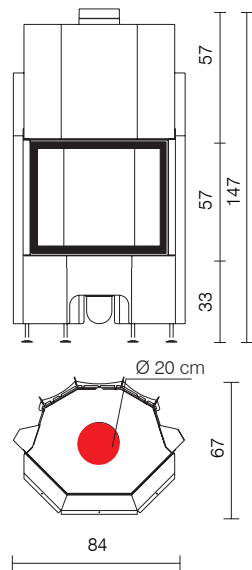


**Cristal 76**

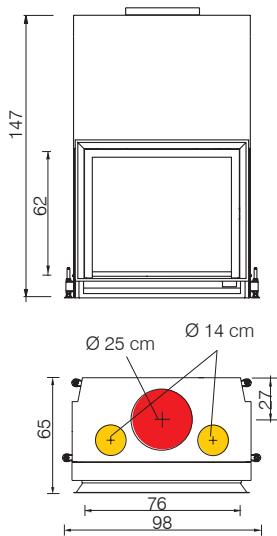

**Cristal 90**

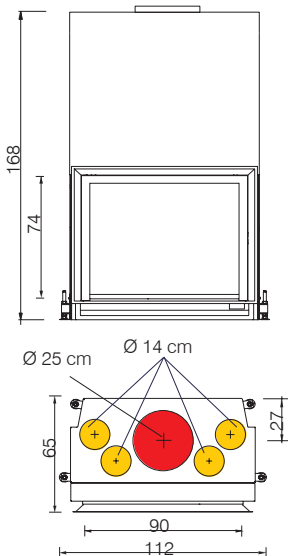


**Double**

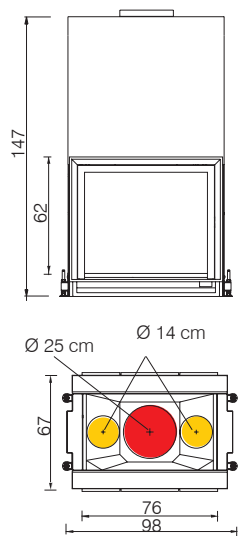


# FIREPLACES


Flat 100

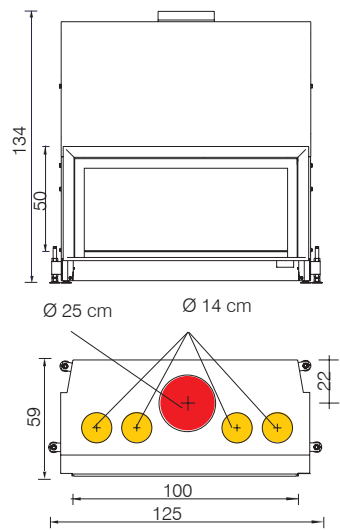


Flat 120

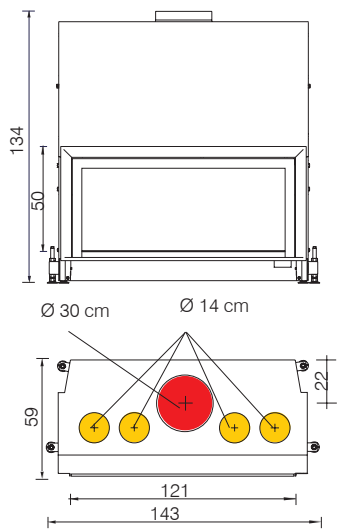


Titano Up2

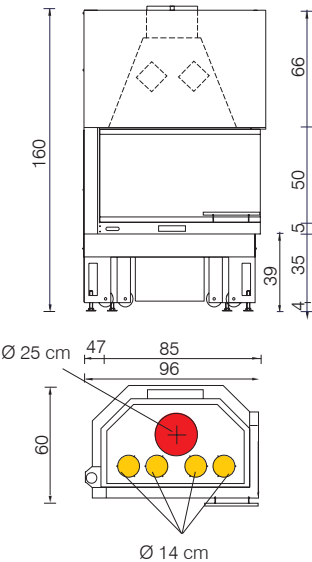

Forte Up2

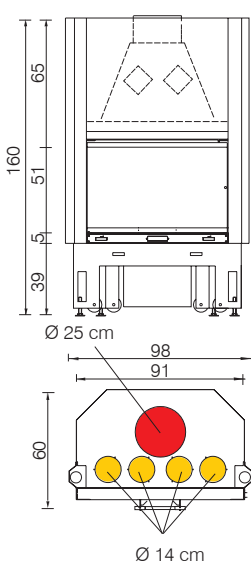


Status Up2

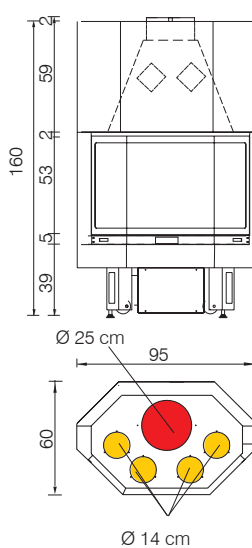




# FIREPLACES


IC Tekno  
1

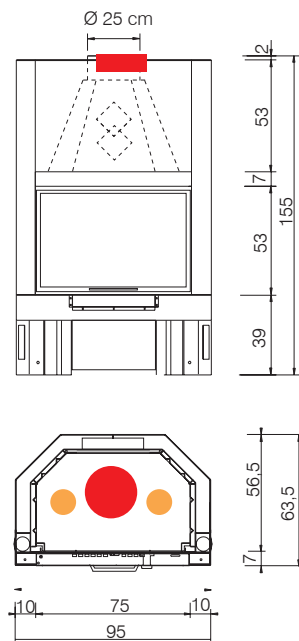


IC Tekno  
2

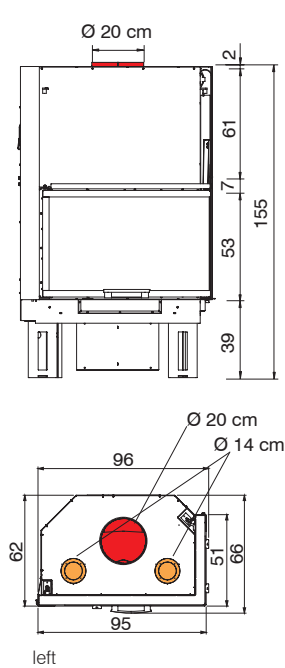


IC Tekno  
3

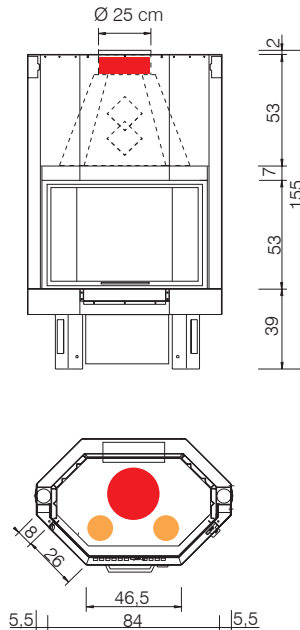

Screen Up 80/2  
Screen Evo 80/2

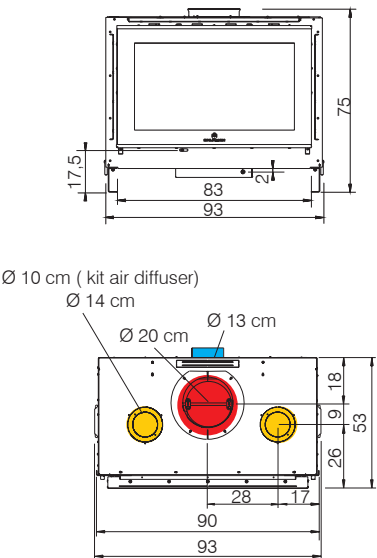


Screen Up 100  
Screen Evo 100

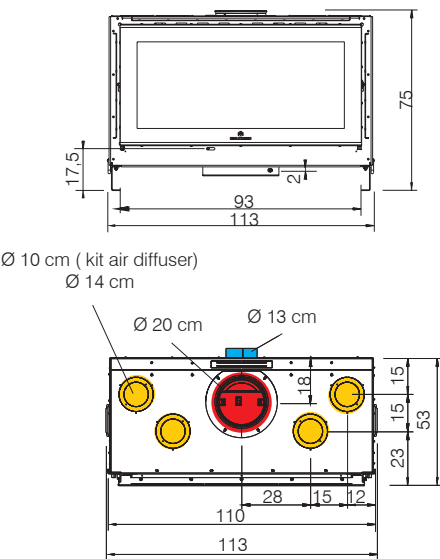


## INSERTS


**Firebox Deco**

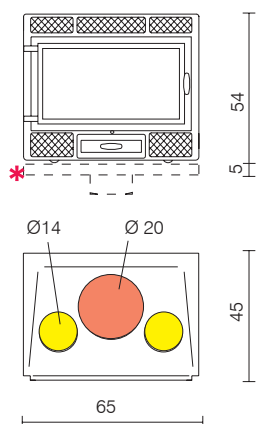


**Firebox Riga  
49 / 54**

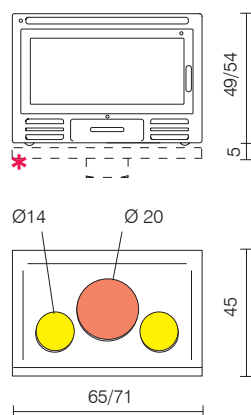

**Kubicalor Ecostar**

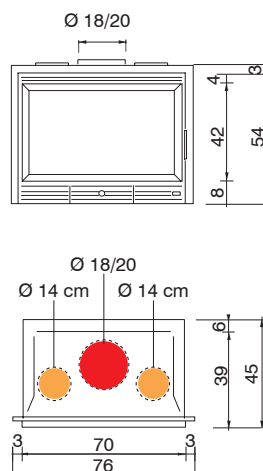


**Kubicalor Piana**

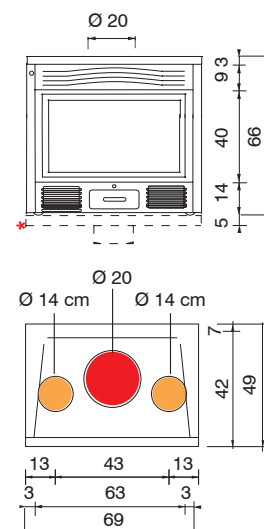


\* External air intake Mechanism


**Kubicalor Sprint**

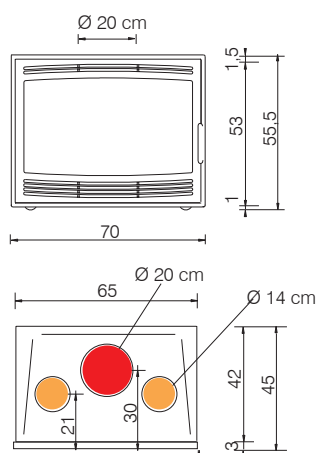

**Firebox Luce Plus  
54**

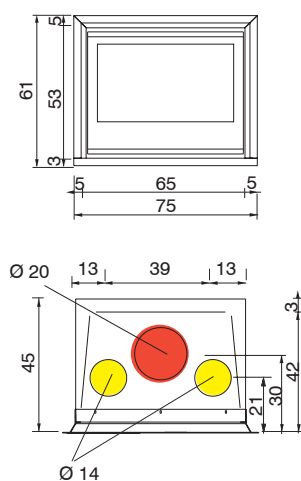

**Firebox Luce Plus  
62**

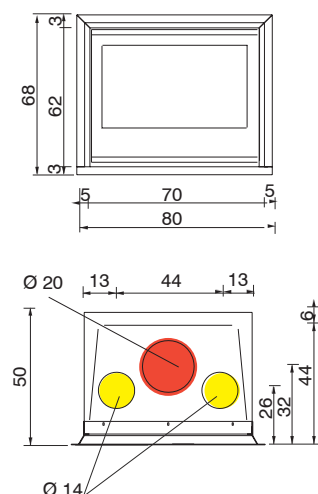

● External air intake

● Smoke outlet


● Hot air outlet



STOVES


Tally 8

steel / soapstone

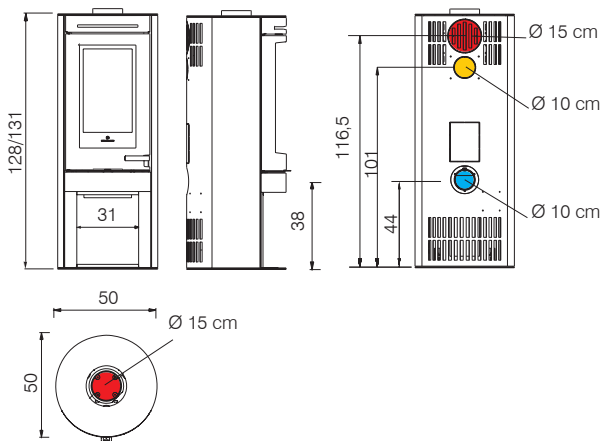


Tally 8 Up

steel / soapstone

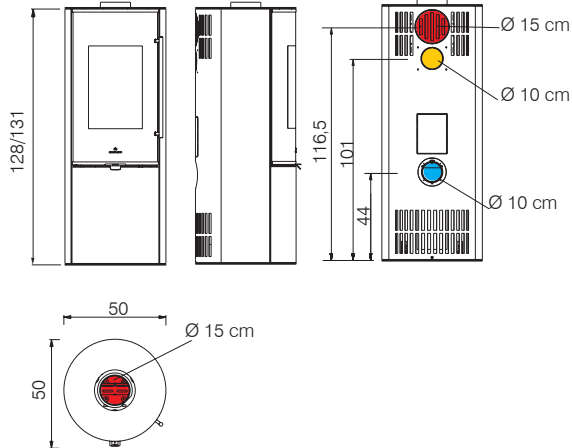

Tally 8 s / Tally 8 up s


steel / soapstone

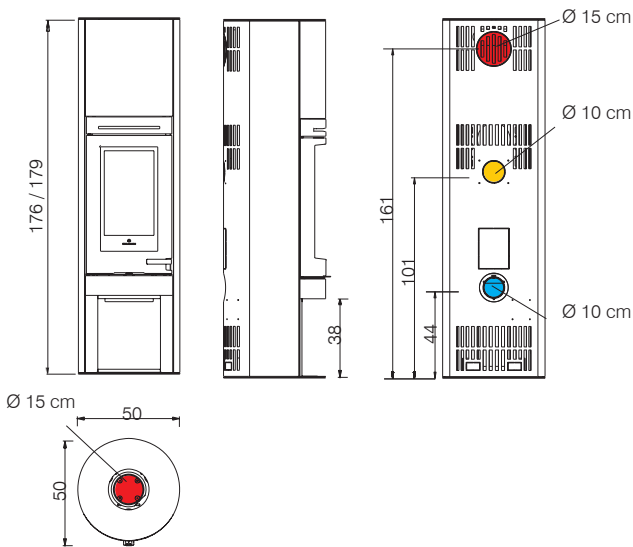

Dafne


Dafne Forno

Ninfa

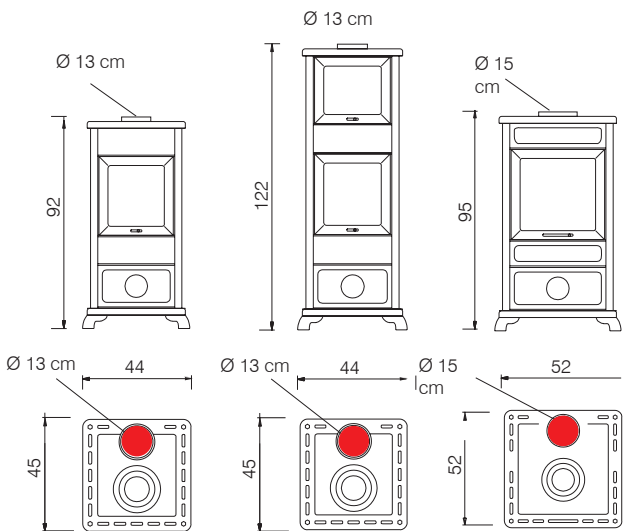


THERMO-STOVES

Fiord

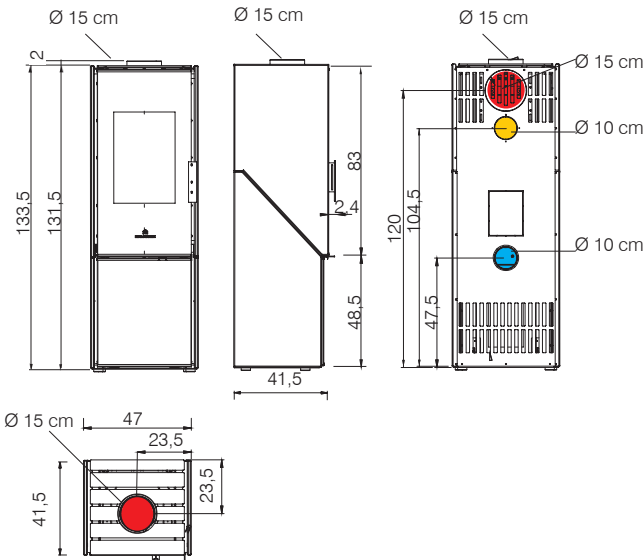


Flamma

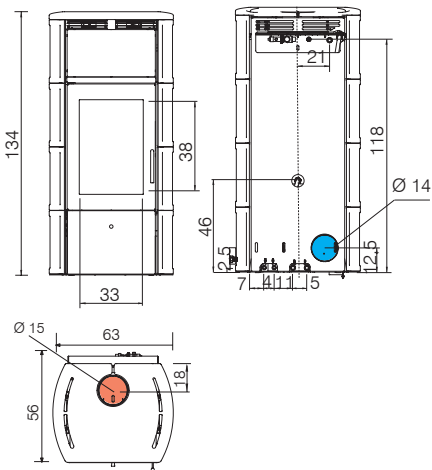


THERMO- FIREPLACES


Acquatondo 22 / Acquatondo 29

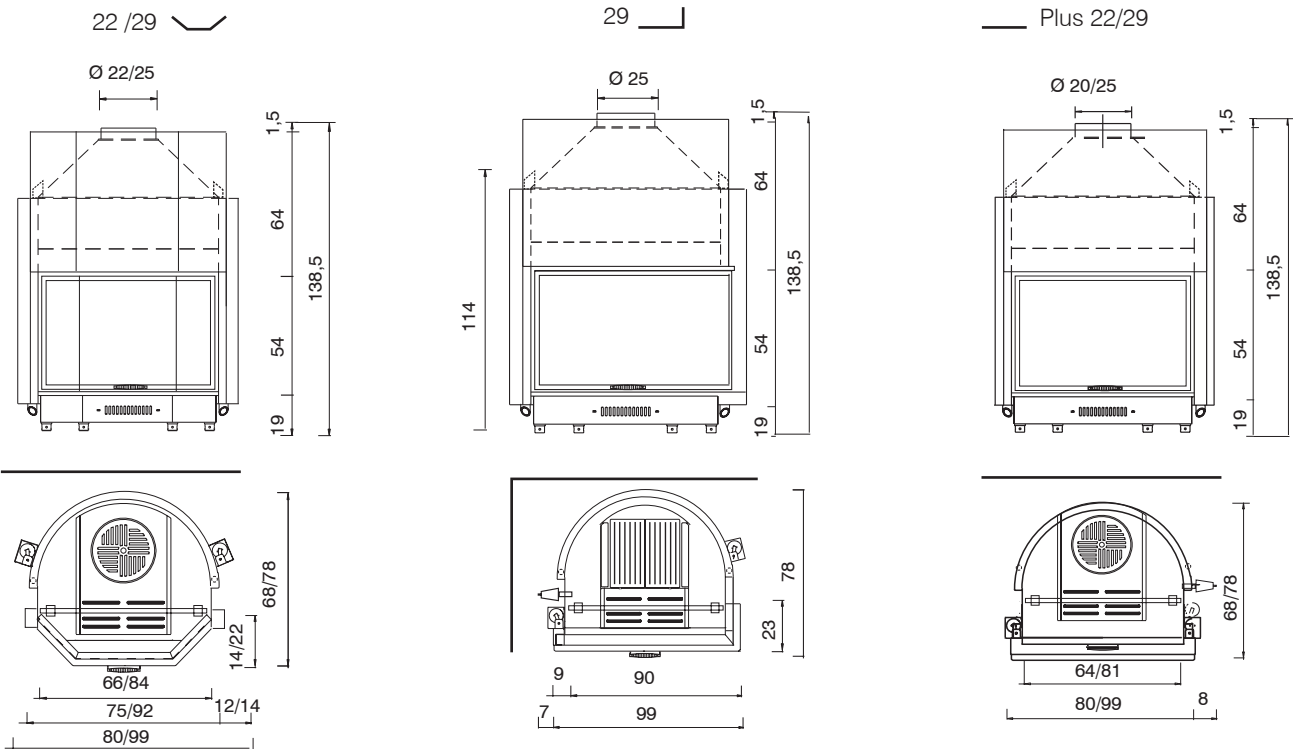


H<sub>2</sub>Oceano 15 / 23 / 28

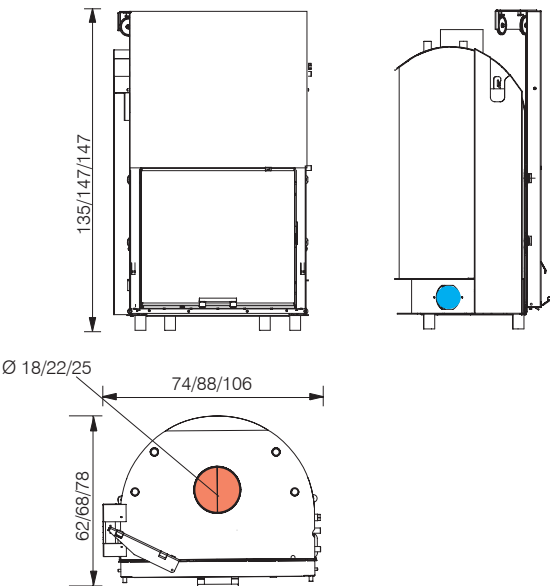

Idro 30

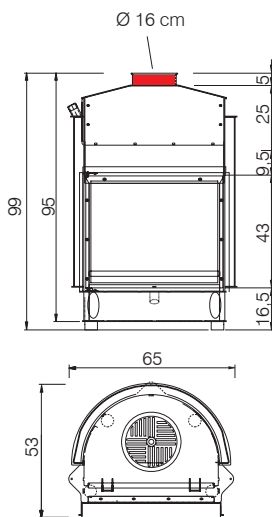

Idro 50

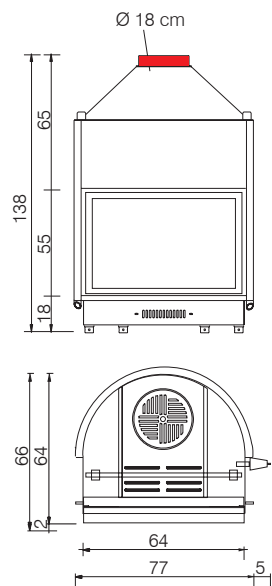

External air intake



Smoke outlet



Hot air outlet





|        | Side Plus 50X50 | Windo2 75<br>Windo2 95      | Windo3 P50<br>Windo3 85     | Cristal 76     | Cristal 90<br>Double        | Flat 100<br>Flat 120         | Airfire                     |
|--------|-----------------|-----------------------------|-----------------------------|----------------|-----------------------------|------------------------------|-----------------------------|
| kW     | 12,4            | 13,2<br>14,7                | 12<br>13,2                  | 15             | 20,1<br>12                  | 12<br>14                     | 10                          |
| Kg/h   | 3,2             | 3,3<br>3,9                  | 3,4                         | 4,2            | 5,3<br>3,9                  | 4<br>4,7                     | 3,1                         |
| m³     | 325             | 345<br>385                  | 315<br>345                  | 390            | 525<br>315                  | 315<br>365                   | 260                         |
| %      | 81,8            | 84,6<br>81                  | 75,9<br>84,6                | 77,9           | 82,6<br>67,6                | 65,3                         | 71                          |
| cm     | 18 F ↑          | 20 F ↑                      | 20 F ↑                      | 25 F ↑         | 25 F ↑                      | 25 F ↑<br>30 F ↑             | 20 F ↑                      |
| cm     | 1x Ø 14 cm      | 4x Ø 14 cm                  | 4x Ø 14 cm                  | 2x Ø 14 cm     | 4x Ø 14 cm<br>2x Ø 14 cm    | 4x Ø 14 cm                   | /                           |
| Kg     | 230             | 336<br>380                  | 348<br>350                  | 308            | 368<br>343                  | 350<br>343                   | 263<br>289                  |
|        | •               | /                           | /                           | /              | /                           | /                            | /                           |
|        | •               | /                           | /                           | •              | •                           | •                            | •                           |
|        | E<br>40x40x49h  | E<br>67x36x44h<br>87x36x44h | E<br>38x70x51h<br>69x36x43h | E<br>68x37x60h | E<br>82x34x72h<br>68x37x60h | E<br>100x38x50<br>120x38x50h | R<br>50x42x56h<br>50x43x56h |
|        | •               | •                           | •                           | /              | /                           | /                            | /                           |
| Energy | A+              | A+                          | A<br>A+                     | A              | A+<br>A                     | A<br>A                       | A                           |

## SYMBOLS KEY



kW  
Power



Kg/h  
Consumption  
min/max



m³  
Heatable volume  
m³



Efficiency



Smoke outlet  
↑ Top ↗ rear → side



Hot air outlet n° x Ø cm



Weight with packaging  
Kg



Hearth  
G Cast Iron, A Steel,  
V Vermiculite, E Ecokeram

The heatable volume is calculated based on a requirement of 33 kcal/m³h. The same volume may therefore vary considerably depending on the level of insulation in the home, its exposure, the climatic area, etc.



| Status Up2<br>Forte Up2<br>Titano Up2    | IC Tekno<br>1<br>2<br>3               | Screen Evo 80/2<br>Screen Evo 100 | Screen Up 80/2<br>Screen Up 100 | Firebox Luce Plus<br>54-62<br>Firebox Deco | Firebox Riga<br>49<br>54    | Kubicalor Piana<br>Kubicalor Sprint<br>Kubicalor Ecostar |
|------------------------------------------|---------------------------------------|-----------------------------------|---------------------------------|--------------------------------------------|-----------------------------|----------------------------------------------------------|
| 15,2                                     | 15,2                                  | 10,4<br>14,6                      | 10,4<br>14,6                    | 9,6                                        | 9,6                         | 9,6                                                      |
| 4,2                                      | 4,2                                   | 2,8<br>3,8                        | 2,8<br>3,8                      | 2,3                                        | 2,3                         | 2,3                                                      |
| 395                                      | 395                                   | 270<br>380                        | 270<br>380                      | 250                                        | 250                         | 250                                                      |
| 78                                       | 78                                    | 81,7<br>84,5                      | 81,7<br>84,5                    | 89,5                                       | 89,5                        | 89,5                                                     |
| 20 F ↑                                   | 20 F ↑                                | 20 F ↑                            | 20 F ↑                          | 20 M ↑                                     | 20 M ↑                      | 20 M<br>20 M ↑<br>18/20 M                                |
| 4x Ø 14 cm                               | 2x Ø 14<br>cm                         | 2x Ø 14 cm                        | 2x Ø 14 cm                      | 2x Ø 14 cm                                 | 2x Ø 14 cm                  | 2x Ø 14<br>cm                                            |
| 287/292<br>305/310<br>293/303            | 248-251<br>248-252<br>238-243         | 167<br>200                        | 165<br>197                      | 126/144<br>124                             | 111/144                     | 153                                                      |
| •                                        | •                                     | /                                 | /                               | •<br>•<br>•                                | •<br>•                      | •<br>•<br>•                                              |
| •                                        | •                                     | •                                 | •                               | •<br>•<br>/                                | /                           | /                                                        |
| G<br>74x45x49h<br>64x46x38h<br>75x45x38h | G<br>75x48x50<br>78x48x54<br>75x48x50 | E<br>73x40x44h<br>93x40x44h       | E<br>73x40x44h<br>93x40x44h     | G<br>55x38x29h<br>57x38x29h<br>55x29x29h   | G<br>60x28x25h<br>55x28x29h | G<br>54x38x29<br>57x35x30<br>57x35x30                    |
| •                                        | •                                     | •                                 | •                               | •                                          | •                           | /                                                        |
| A                                        | A                                     | A+                                | A+                              | A+                                         | A+                          | A+                                                       |



Forced ventilation (V)



Natural convection (N)



Post-combustion system

Energy

Energy efficiency classes







|        | Tally 8               | Tally 8 Up            | Fiord          | Dafne         | Dafne oven    | Ninfa         |
|--------|-----------------------|-----------------------|----------------|---------------|---------------|---------------|
| kW     | 8                     | 8                     | 8              | 7,2           | 7,2           | 9             |
| Kg/h   | 2                     | 2                     | 2              | 1,9           | 1,9           | 2,5           |
| m³     | 210                   | 210                   | 210            | 190           | 190           | 235           |
| %      | 85,6                  | 85,6                  | 85,6           | 82,6          | 82,6          | 78,3          |
| cm     | 15 M ↗                | 15 M ↗                | 15 M ↑         | 13 M ↑        | 13 M ↑        | 15 M ↑        |
| cm     | 1x Ø 10 cm            | 1x Ø 10 cm            | 1x Ø 10 cm     | /             | /             | /             |
| Kg     | 158/246<br>238/330+40 | 171/245<br>178/274+40 | 150            | 109           | 134           | 147           |
|        | /                     | /                     | /              | /             | /             | /             |
|        | •                     | •                     | •              | •             | •             | •             |
|        | V<br>29x23x39h        | V<br>29x23x39h        | V<br>29x23x39h | G<br>33x30x33 | G<br>33x30x33 | G<br>39x40x42 |
|        | /                     | /                     | •              | /             | /             | /             |
| Energy | A+                    | A+                    | A+             | A+            | A+            | A             |

## SYMBOLS KEY



kW  
Power



% Efficiency



Kg Weight with packaging  
Kg



Kg/h Consumption  
min/max



cm Smoke outlet  
↑ Top ↗ rear → side



Hearth  
G Cast Iron, A Steel,  
V Vermiculite, E Ecokeram



m³ Heatable volume  
m³



Hot air outlet n° x Ø cm

The heatable volume is calculated based on a requirement of 33 kcal/m³h. The same volume may therefore vary considerably depending on the level of insulation in the home, its exposure, the climatic area, etc.

The calculation of fuel consumption assumes a calorific value of 4.6 kW/kg for wood.



|                                                                                                       | H <sub>2</sub> ocean 15<br>H <sub>2</sub> ocean 23<br>H <sub>2</sub> ocean 28 | Idro 30<br>Idro 50          | Acquatondo 22    | Acquatondo 29    | Flamma             |
|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|-----------------------------|------------------|------------------|--------------------|
|  kW                  | 16,6<br>23<br>28,1                                                            | 14,8<br>16,6                | 23               | 28,1             | 14,2<br>23,6       |
|  kW H <sub>2</sub> O | 8,2<br>13,3<br>17,4                                                           | 8,6<br>8,2                  | 13,3             | 17,4             | 9,7<br>14,6        |
|  Kg/h                | 4,4<br>6,1<br>7,5                                                             | 4,3<br>4,4                  | 6,1              | 7,5              | 3,5<br>6,1         |
|  m <sup>3</sup>      | 435<br>600<br>730                                                             | 385<br>435                  | 600              | 730              | 370<br>615         |
|  %                   | 83,1<br>82,2<br>81,5                                                          | 75,1<br>83,1                | 82,2             | 81,5             | 87,4<br>84,6       |
|  cm                 | 18 F<br>22 F<br>25 F                                                          | 16 F<br>18 F                | 20 F             | 25 F             | 15 M               |
|  Kg                | 246-251 cs<br>297-303 cs<br>302-308 cs                                        | 116-123 cs<br>171-189 cs    | 234-249 cs       | 302-311 cs       | 278<br>283 cs      |
|  l                 | 75<br>100<br>130                                                              | 30<br>60                    | 70               | 90               | 40                 |
|                    | A/G<br>52x40x40h<br>60x50x40h<br>78x63x40h                                    | A/G<br>49x40x43<br>56x47x51 | A/G<br>56x47x50h | A/G<br>74x55x50h | A/V<br>cm 33x34x38 |
| Energy                                                                                                | A+                                                                            | A<br>A+                     | A+               | A+               | A+                 |



Forced ventilation (V)



Natural convection (N)



Post-combustion system



kW  
Water



Water capacity

Energy

Energy efficiency classes





|                     |       |
|---------------------|-------|
| Acquatondo 22       | 44    |
| Acquatondo 29       | 44    |
| Airfire             | 22    |
| Cristal 76          | 14    |
| Cristal 90          | 15    |
| Dafne               | 38-39 |
| Double              | 15    |
| Fiord               | 36    |
| Firebox Deco        | 27    |
| Firebox Luce Plus   | 27    |
| Firebox Riga        | 28    |
| Flamma              | 48    |
| Flat 100            | 16    |
| Flat 120            | 16    |
| Forte Up2           | 20    |
| Grey Up             | 51    |
| Kubicalor Ecostar   | 30    |
| Kubicalor Piana     | 30    |
| Kubicalor Sprint    | 30    |
| H2oceano 15/23/28   | 42    |
| IC Tekno            | 18    |
| Idro 30             | 46    |
| Idro 50             | 46    |
| Iron                | 50    |
| Ninfa               | 37    |
| Screen Evo 80/2-100 | 24    |
| Screen Up 80/2-100  | 24    |
| Side Plus 50x50     | 12    |
| Silver              | 50    |
| Status Up2          | 20    |
| Tally 8             | 32-33 |
| Tally 8 s           | 35    |
| Tally 8 Up          | 33    |
| Tally 8 Up s        | 34    |
| Titano Up2          | 21    |
| Windo2 75/95        | 12    |
| Windo3 85           | 10    |



**IO SONO  
IL FUOCO**

**EDILKAMIN S.p.A.**

Reserves the right to change the technical and aesthetic specifications of the components illustrated in this catalogue, at any time and without prior notice and declines all responsibility for any printing errors in this catalogue.

 **EDILKAMIN**  
STUFE\_CALDAIE\_CAMINETTI





AL 945297 .11.19/B.web

